




K9 HEATER

WIRE GUARD FITTING INSTRUCTIONS

The wire guard is an optional extra purchase and is helpful if you have a dog that excessively chews or are concerned about the minimum distance required between the bottom of the heater and your dog. The guard will help to ensure that the heater cannot be obstructed or chewed by your dog whilst in it's kennel. This will maintain a good airflow from the bottom of the heater to prevent it from overheating or protect it from becoming damaged by a chewing mouth.

After completing **Steps 1 to 6** in the K9 Heater fitting instructions, now is the time to fit the wire guard if you have purchased this as an optional extra.

Step 7. Place the guard over the K9 Heater with the yellow label which is attached to the guard at the top. The yellow label depicts a slightly larger hole in the mesh which is where the temperature control knob needs to sit. Position the guard so that the top of the temperature knob is flush with the top of the wire mesh, the temperature knob should be sitting to the left hand side of the hole (see pictures).

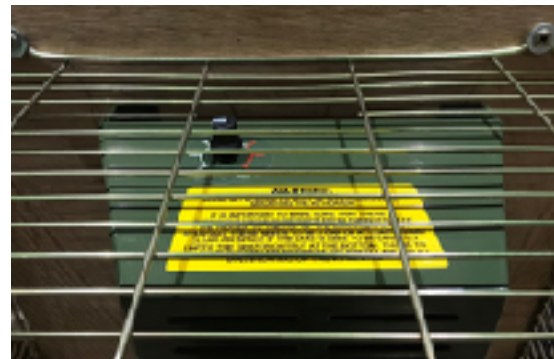

Step 8. Once in place, secure the guard with 4 screws and 4 washers (not supplied), one in each corner of the guard in the pre made eyelet loops.

